
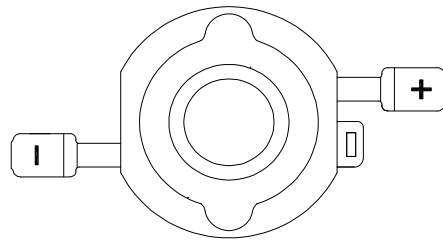


TX-R3A140-010G

PRODUCT SPECIFICATION

--	--	--	--	--	--

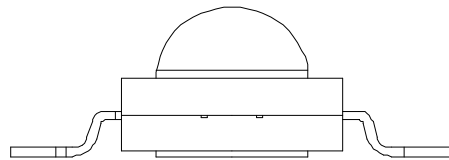

--	--	--	--	--	--

Thermoelectric integrated Red chip packaged in this product.

		2000	
		-40 to +70	
		-40 to +100	

--	--	--	--	--	--

--	--	--	--	--	--

	ϕ				
	θ				
	λ				
	λ				
	λ				
	θ				



1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity
3. The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electrical / Optical Characteristics Curves

--	--	--	--	--	--

TYANSHING

广州市添盛光电有限公司
Guangzhou Tiansheng Photoelectric Co., Ltd

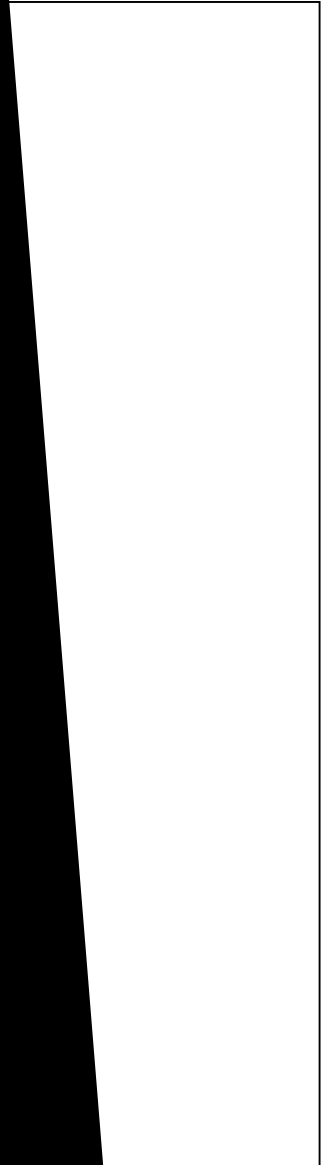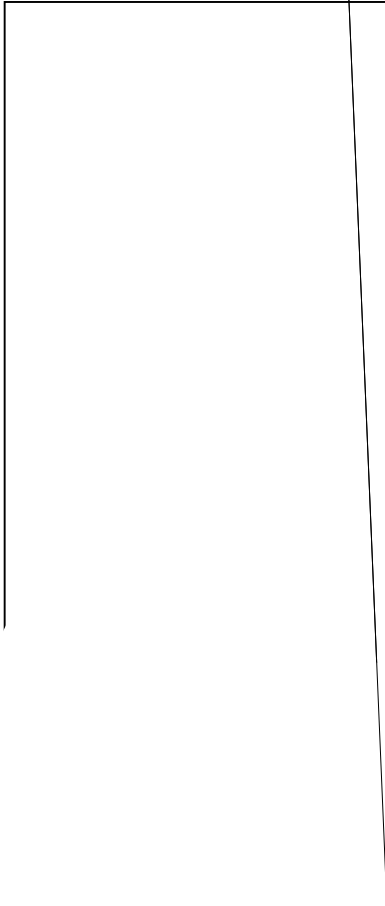A table structure at the bottom of the page, partially obscured by a large black shape. The table has a thin black border and consists of a header row and a data row. The data row is divided into three columns. The table is located in the bottom right corner of the page.