



TX-RBWG8B120-001A

PRODUCT SPECIFICATION

Approved by:

Checked by:

Prepared by:

Part No.	TX-RBWG8B120-001A	Spec No.	WKF-BB8007	Page	1 of 9
-----------------	-------------------	-----------------	------------	-------------	--------

TYANSHINE 广州市天彦光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd

TYANSHINE 广州市天彦光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd

TYANSHINE 广州市天彦光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd



Notes:

- 1.All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (0.01") unless otherwise noted.

Part NO.	Chip Material				Lens Color	Source Color
	Red	Blue	White	Green		
TX-RBWG8B120-001	AlGaInP	GaInN	GaInN	GaInN	Water Clear	Red & True Blue & White& Green

Absolute Maximum Ratings at Ta=25

Parameter	Symbol	MAX.	Unit	
LED Junction Temperature	T _j	135		
Power Dissipation	P _D	R	1300	mW
		B	1800	
		W	1800	
		G	1800	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	I _{FP}	—	mA	
Continuous Forward Current	I _F	500	mA	
Reverse Voltage	V _R	5	V	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Operating Temperature Range	T _{opr}	-30 to +70		
Storage Temperature Range	T _{spr}	-40 to +80		

Notes:

1. Specifications are subject to change without notice.
2. The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
3. Precautions for ESD:
 STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Part No.	TX-RBWG8B120-001A	Spec No.	WKF-BB8007	Page	3 of 9
-----------------	-------------------	-----------------	------------	-------------	--------

TYANSHINE 广州市天砚光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd

TYANSHINE 广州市天砚光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd



TYANSHINE 广州市天砚光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd



TYANSHINE 广州市天砚光电有限公司
Guangzhou Tianyan Photoelectric Co., Ltd




Typical Electrical / Optical Characteristics Curves

(25 Ambient Temperature Unless Otherwise Noted)

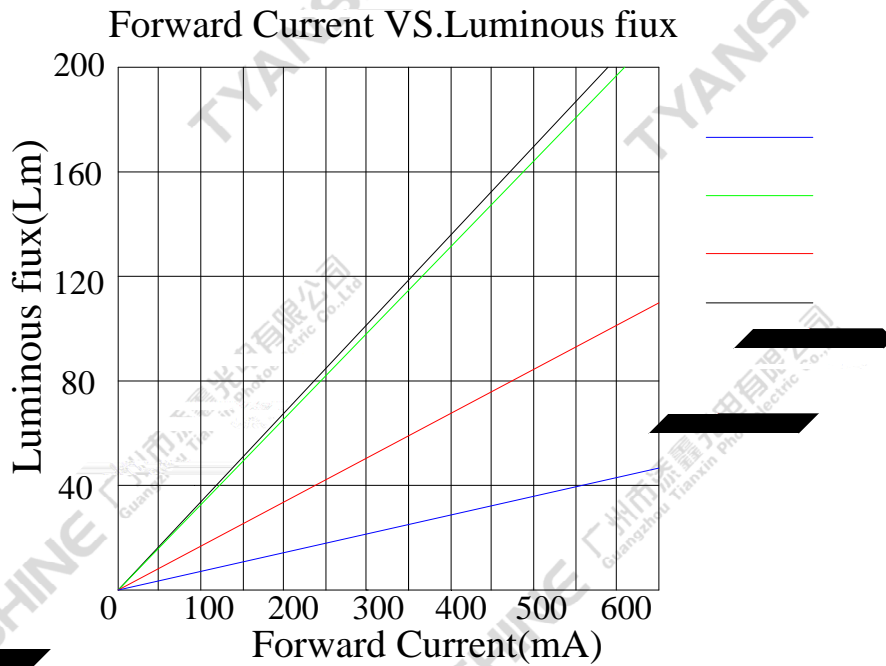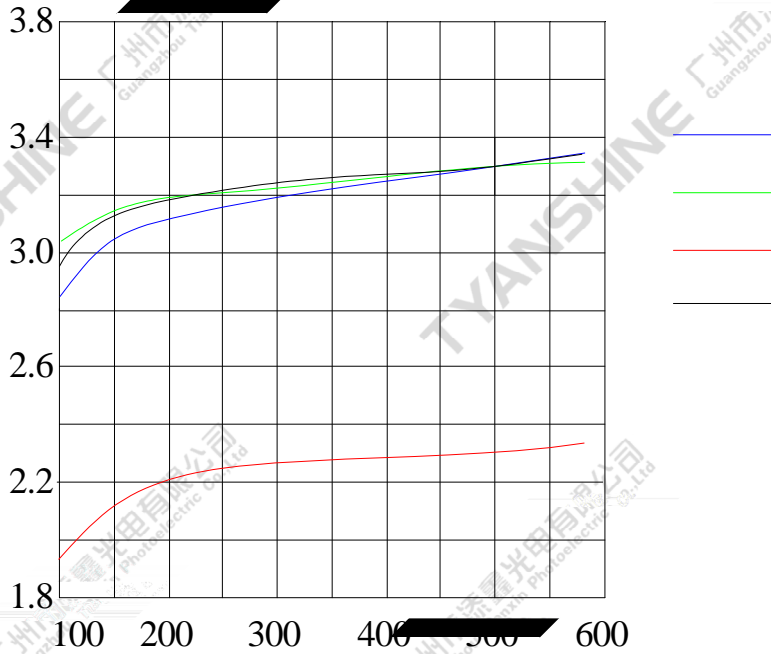

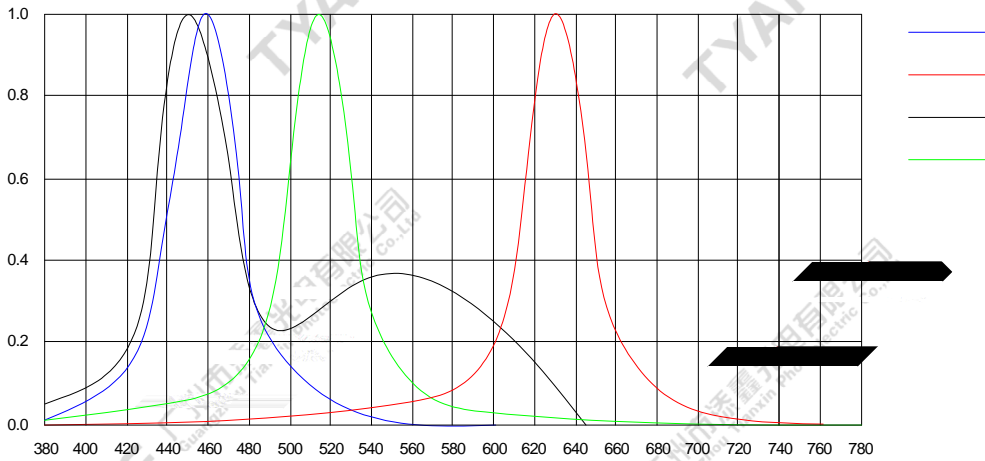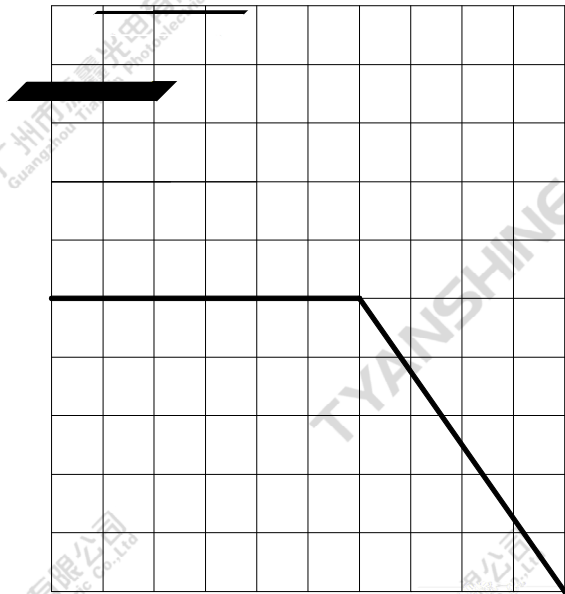

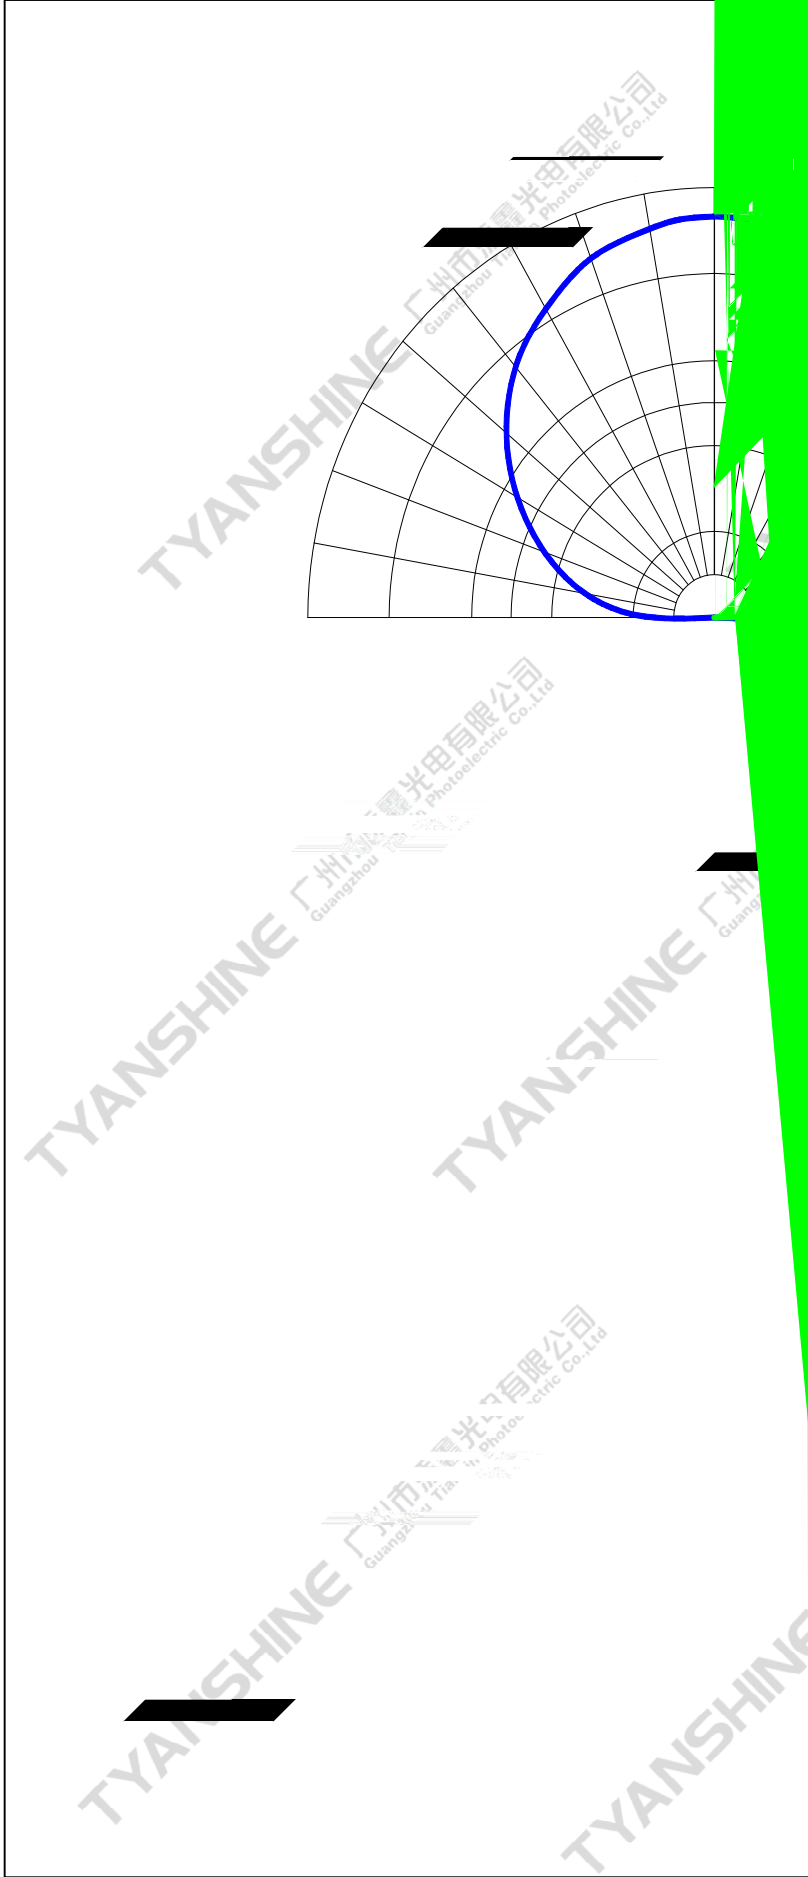

Part No.	TX-RBWG8B120-001A	Spec No.
-----------------	-------------------	-----------------

