


Excellent transiting heat from LED chip operating under 1000 mA.  
 High luminous output.  
 No UV.  
 Encapsulated materials are environmentally certified and meet environmental requirements.

LEVEL1


PC Amber A

Portable Flashlight  
 Garden lighting  
 General Lighting


Part No.	TX-3535A3FCA1-0G4DB-01	Spec No.	WKF-ED0190	Page	1 of 9
----------	------------------------	----------	------------	------	--------

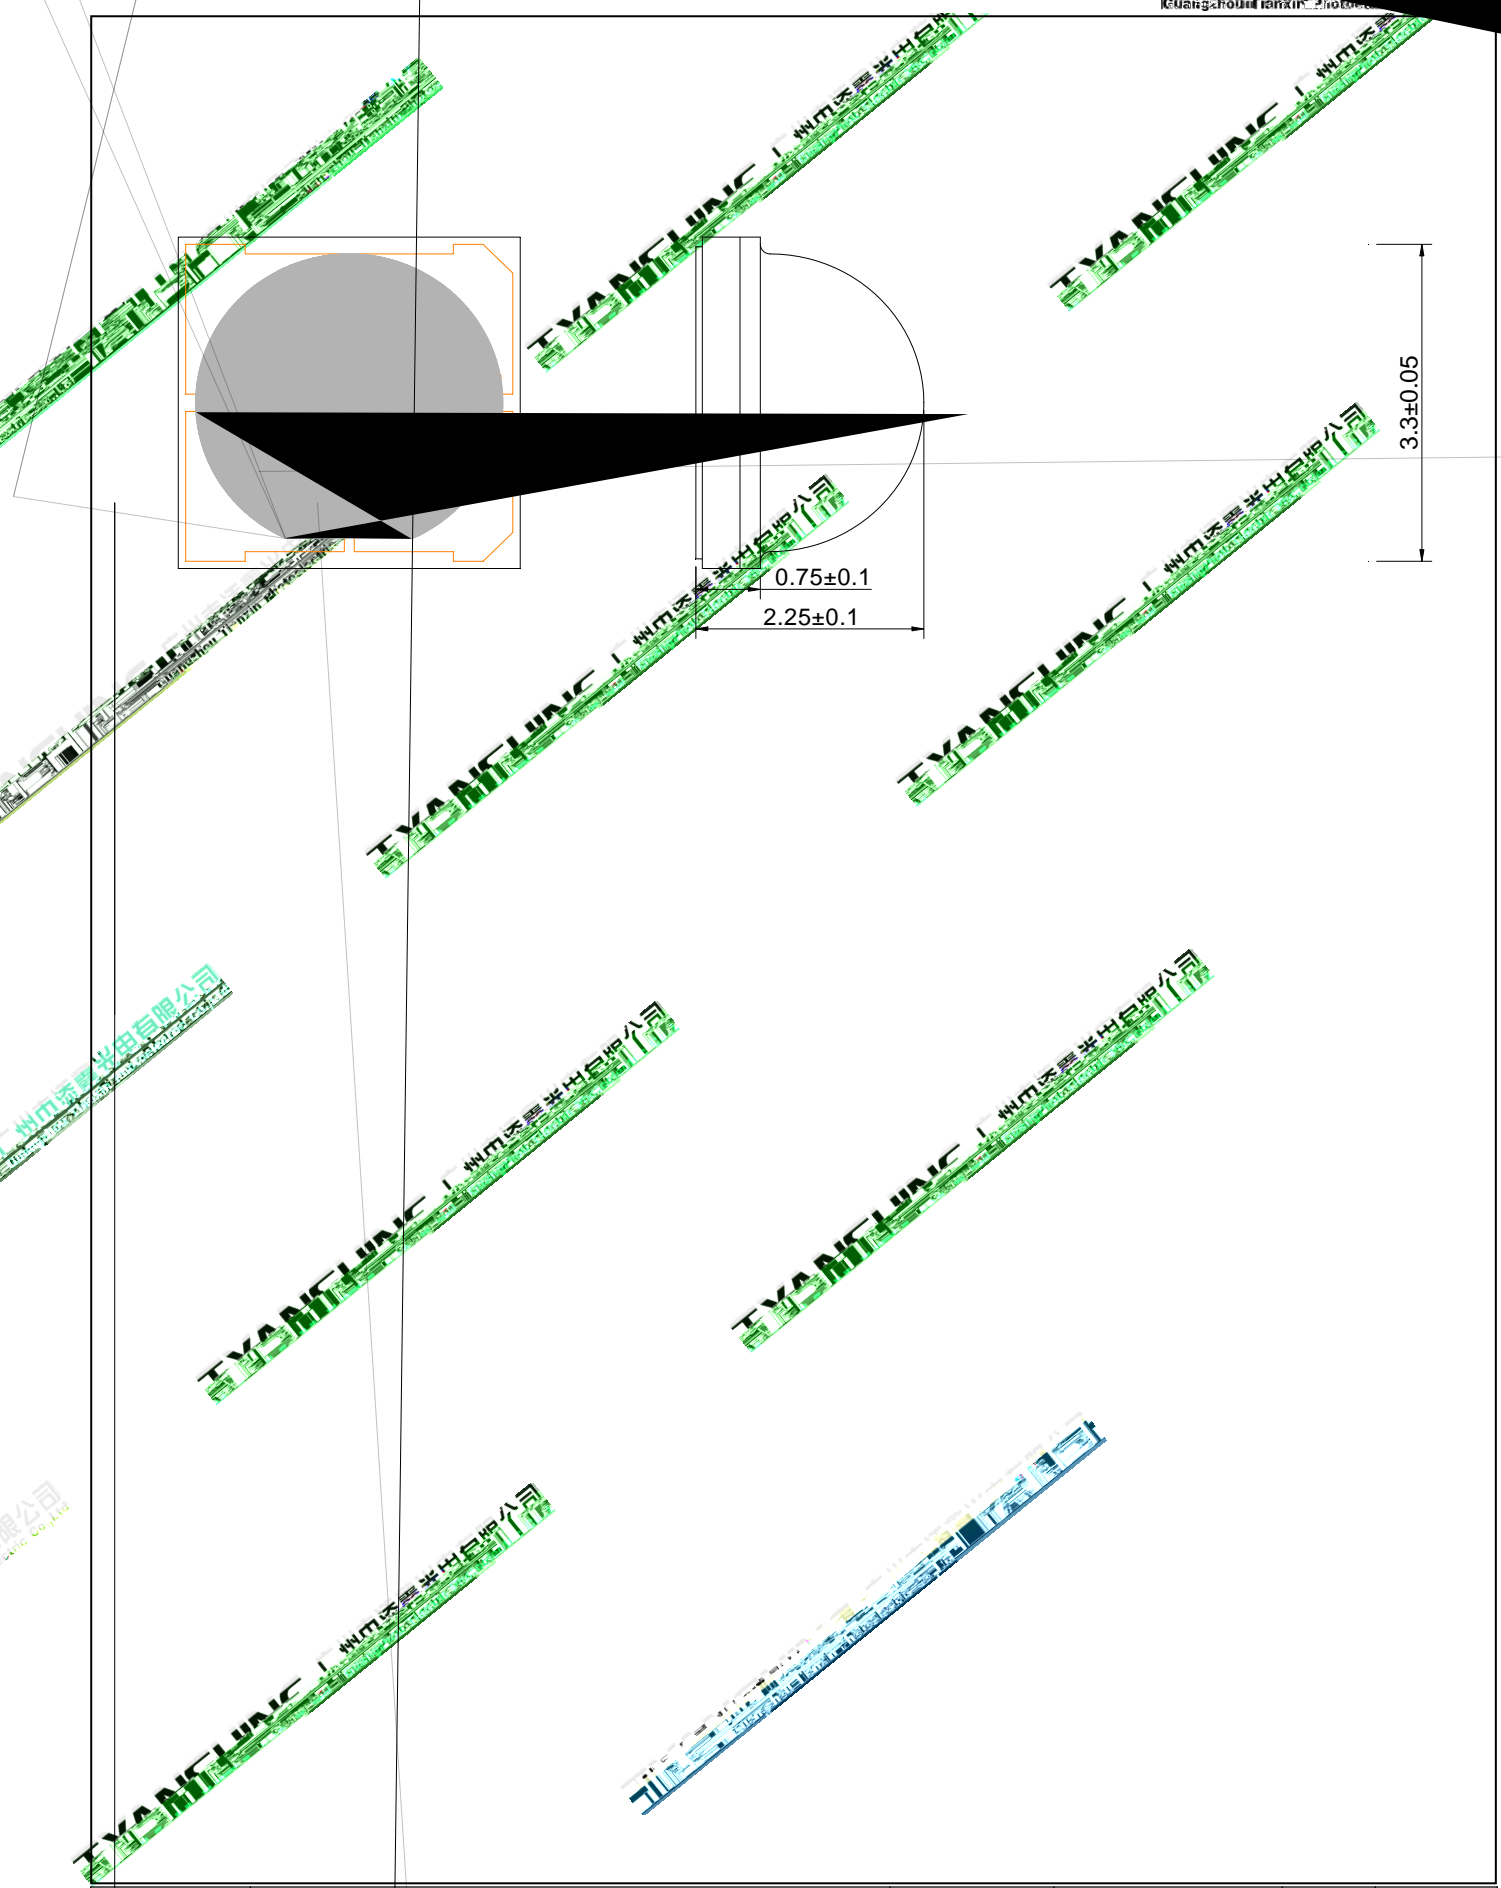

Part No.	TX-3535A3FCA1-0G4DB-01	Spec No.	WKF-ED0190	Page	2 of 9
----------	------------------------	----------	------------	------	--------

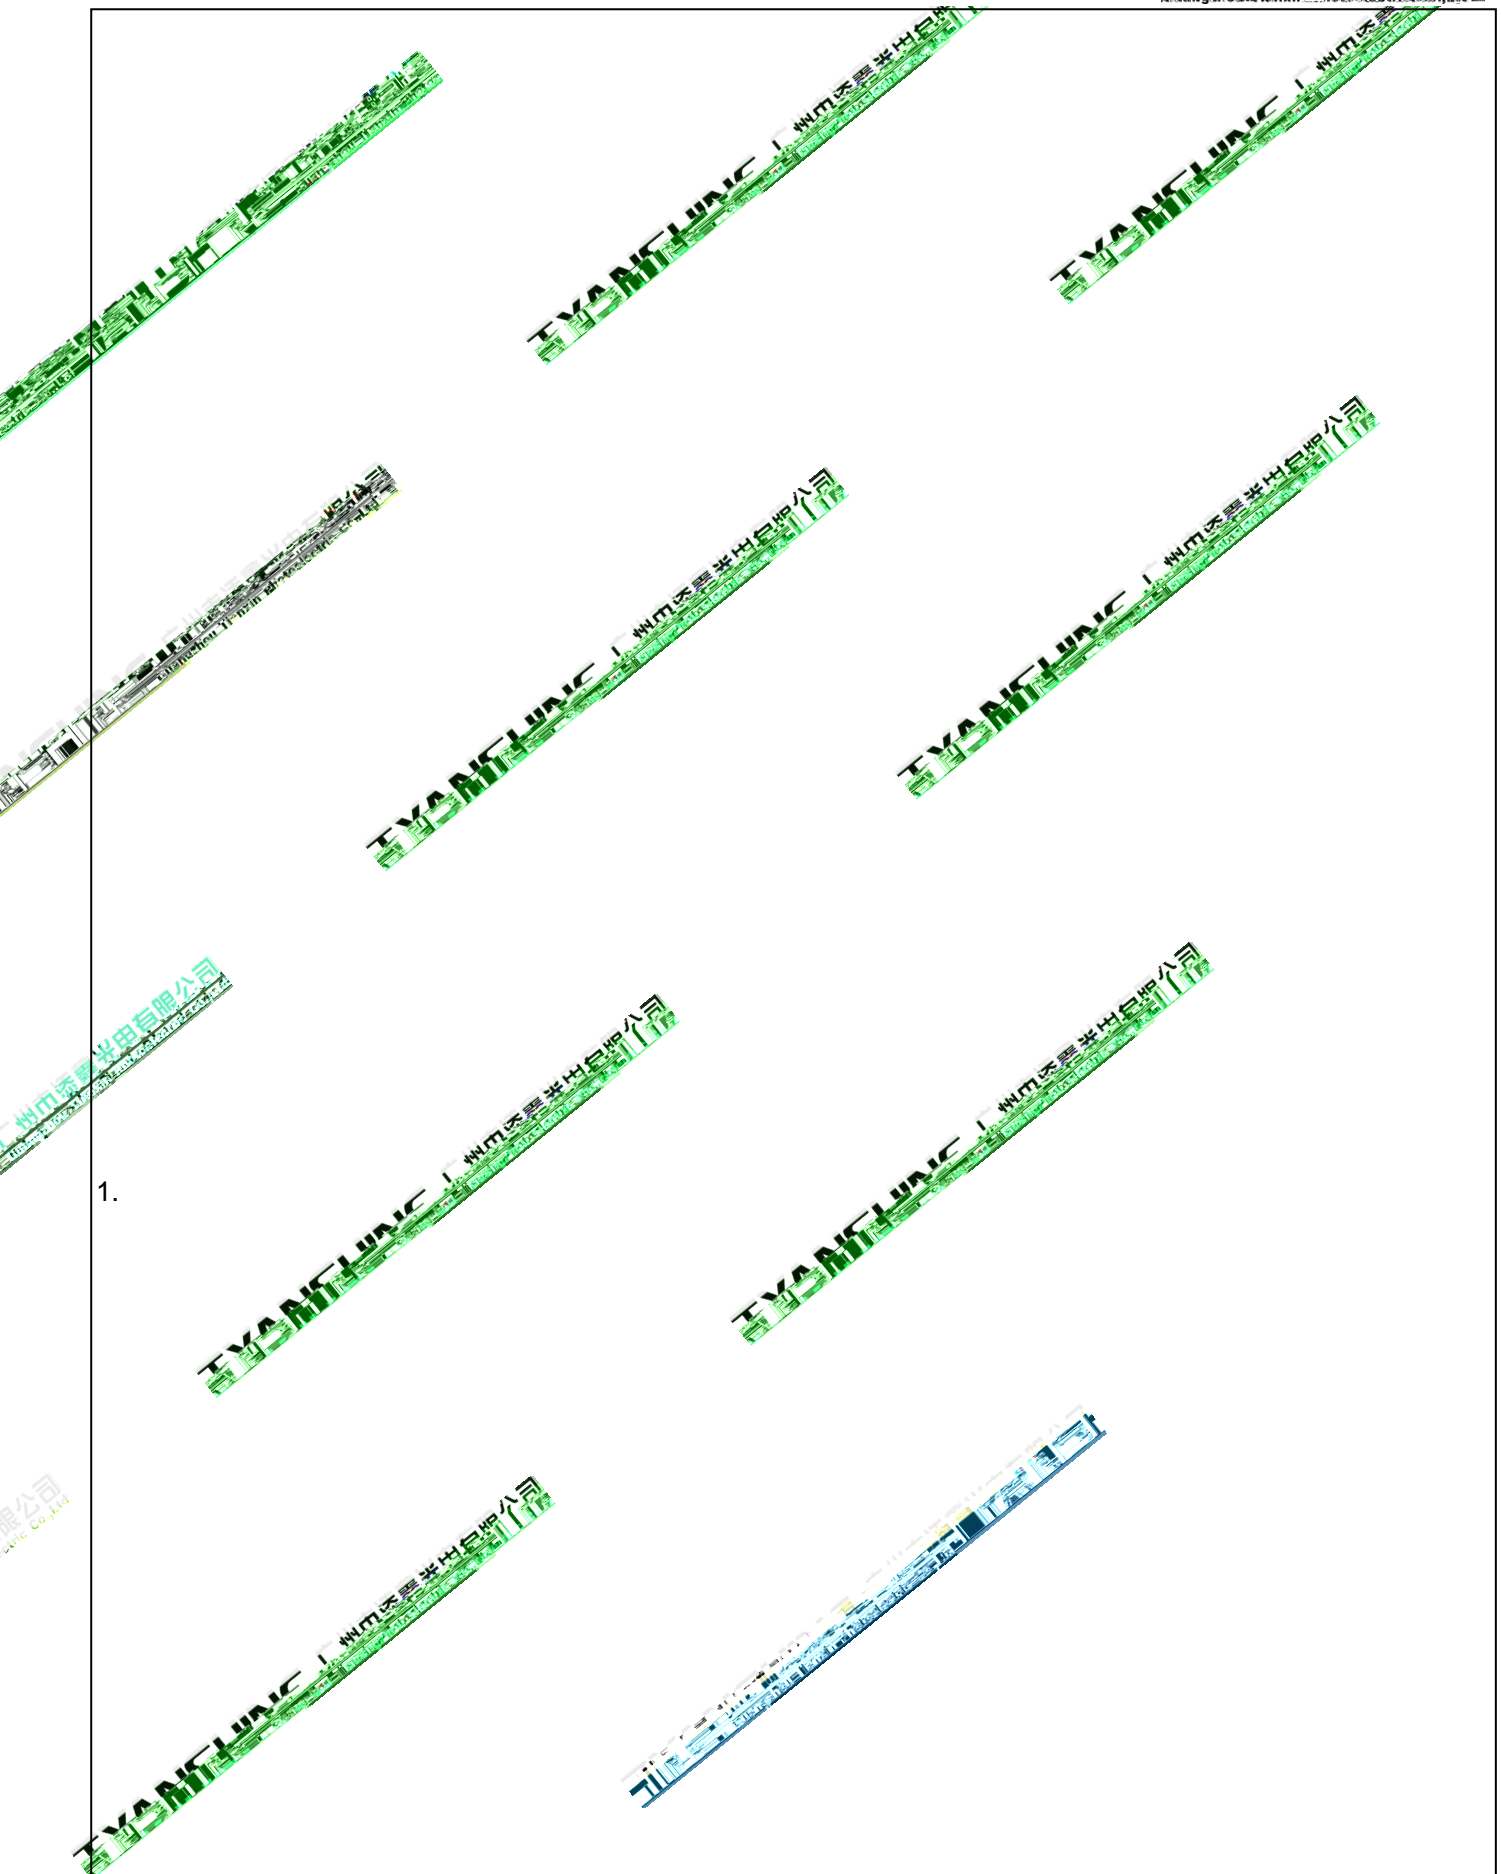


Part No.	TX-3535A3FCA1-0G4DB-01	Spec No.	WKF-ED0190	Page	3 of 9
----------	------------------------	----------	------------	------	--------

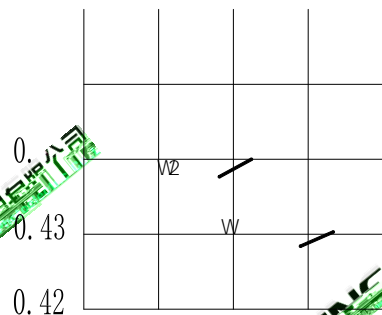


(25 Ambient Temperature Unless Otherwise Noted)


Forward Current VS. Relative Forward Voltage

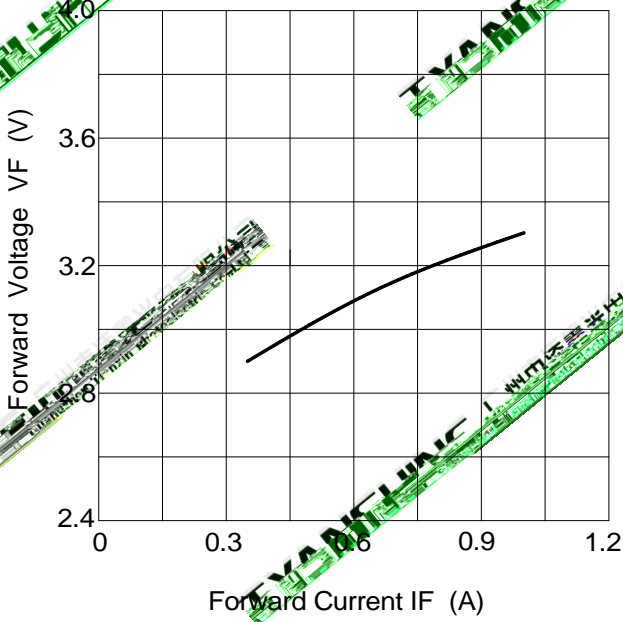


Forward Current VS. Relative Luminous Flux

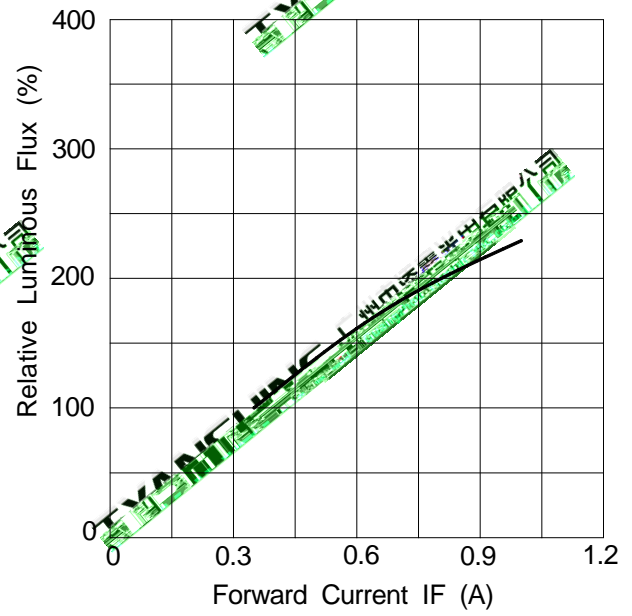

Temperature VS. Relative Forward Voltage

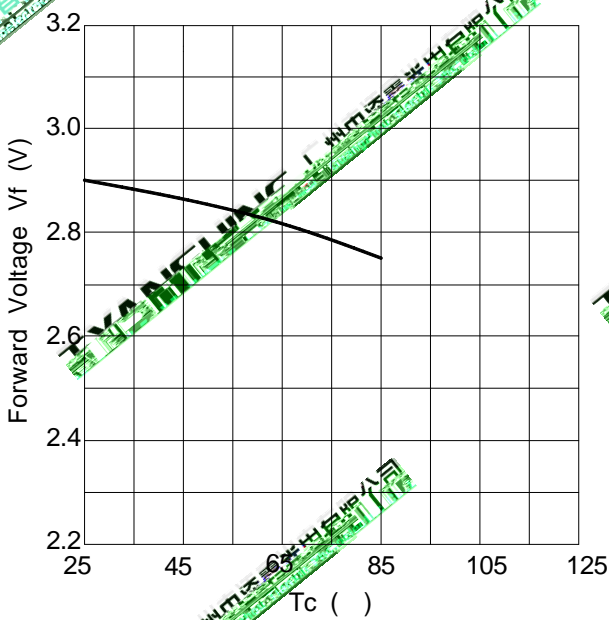


Temperature VS. Relative Luminous Flux

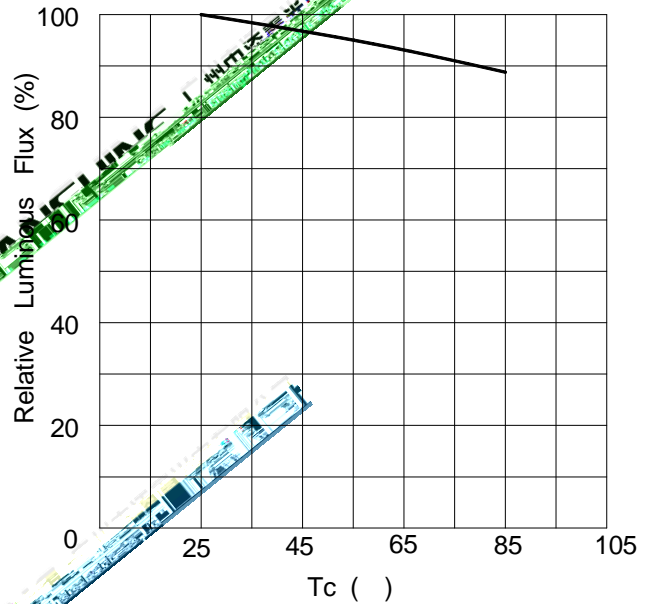

PC Amber (A) ;




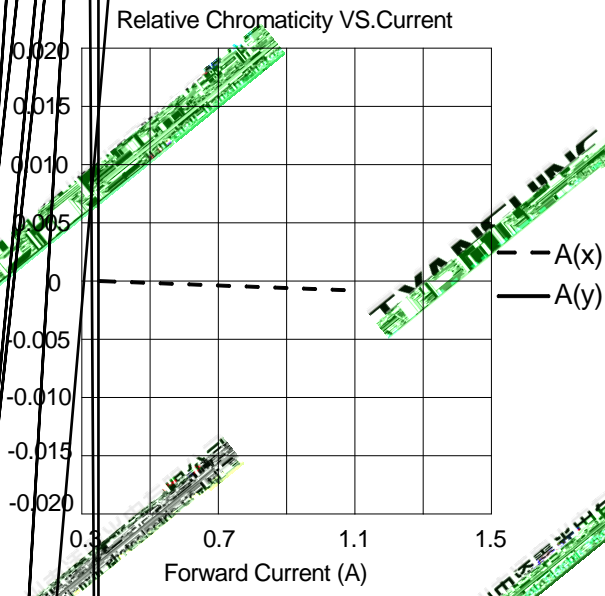


Temperature: 5 ~ 30 (41 ~ 86 )

Humidity: 60% RH Max.

Use the conditions shown to the under figure.

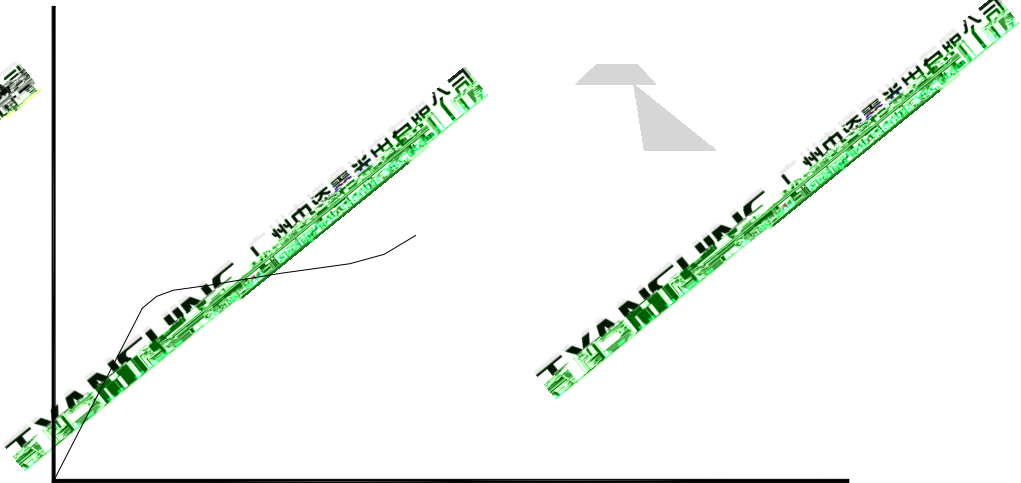

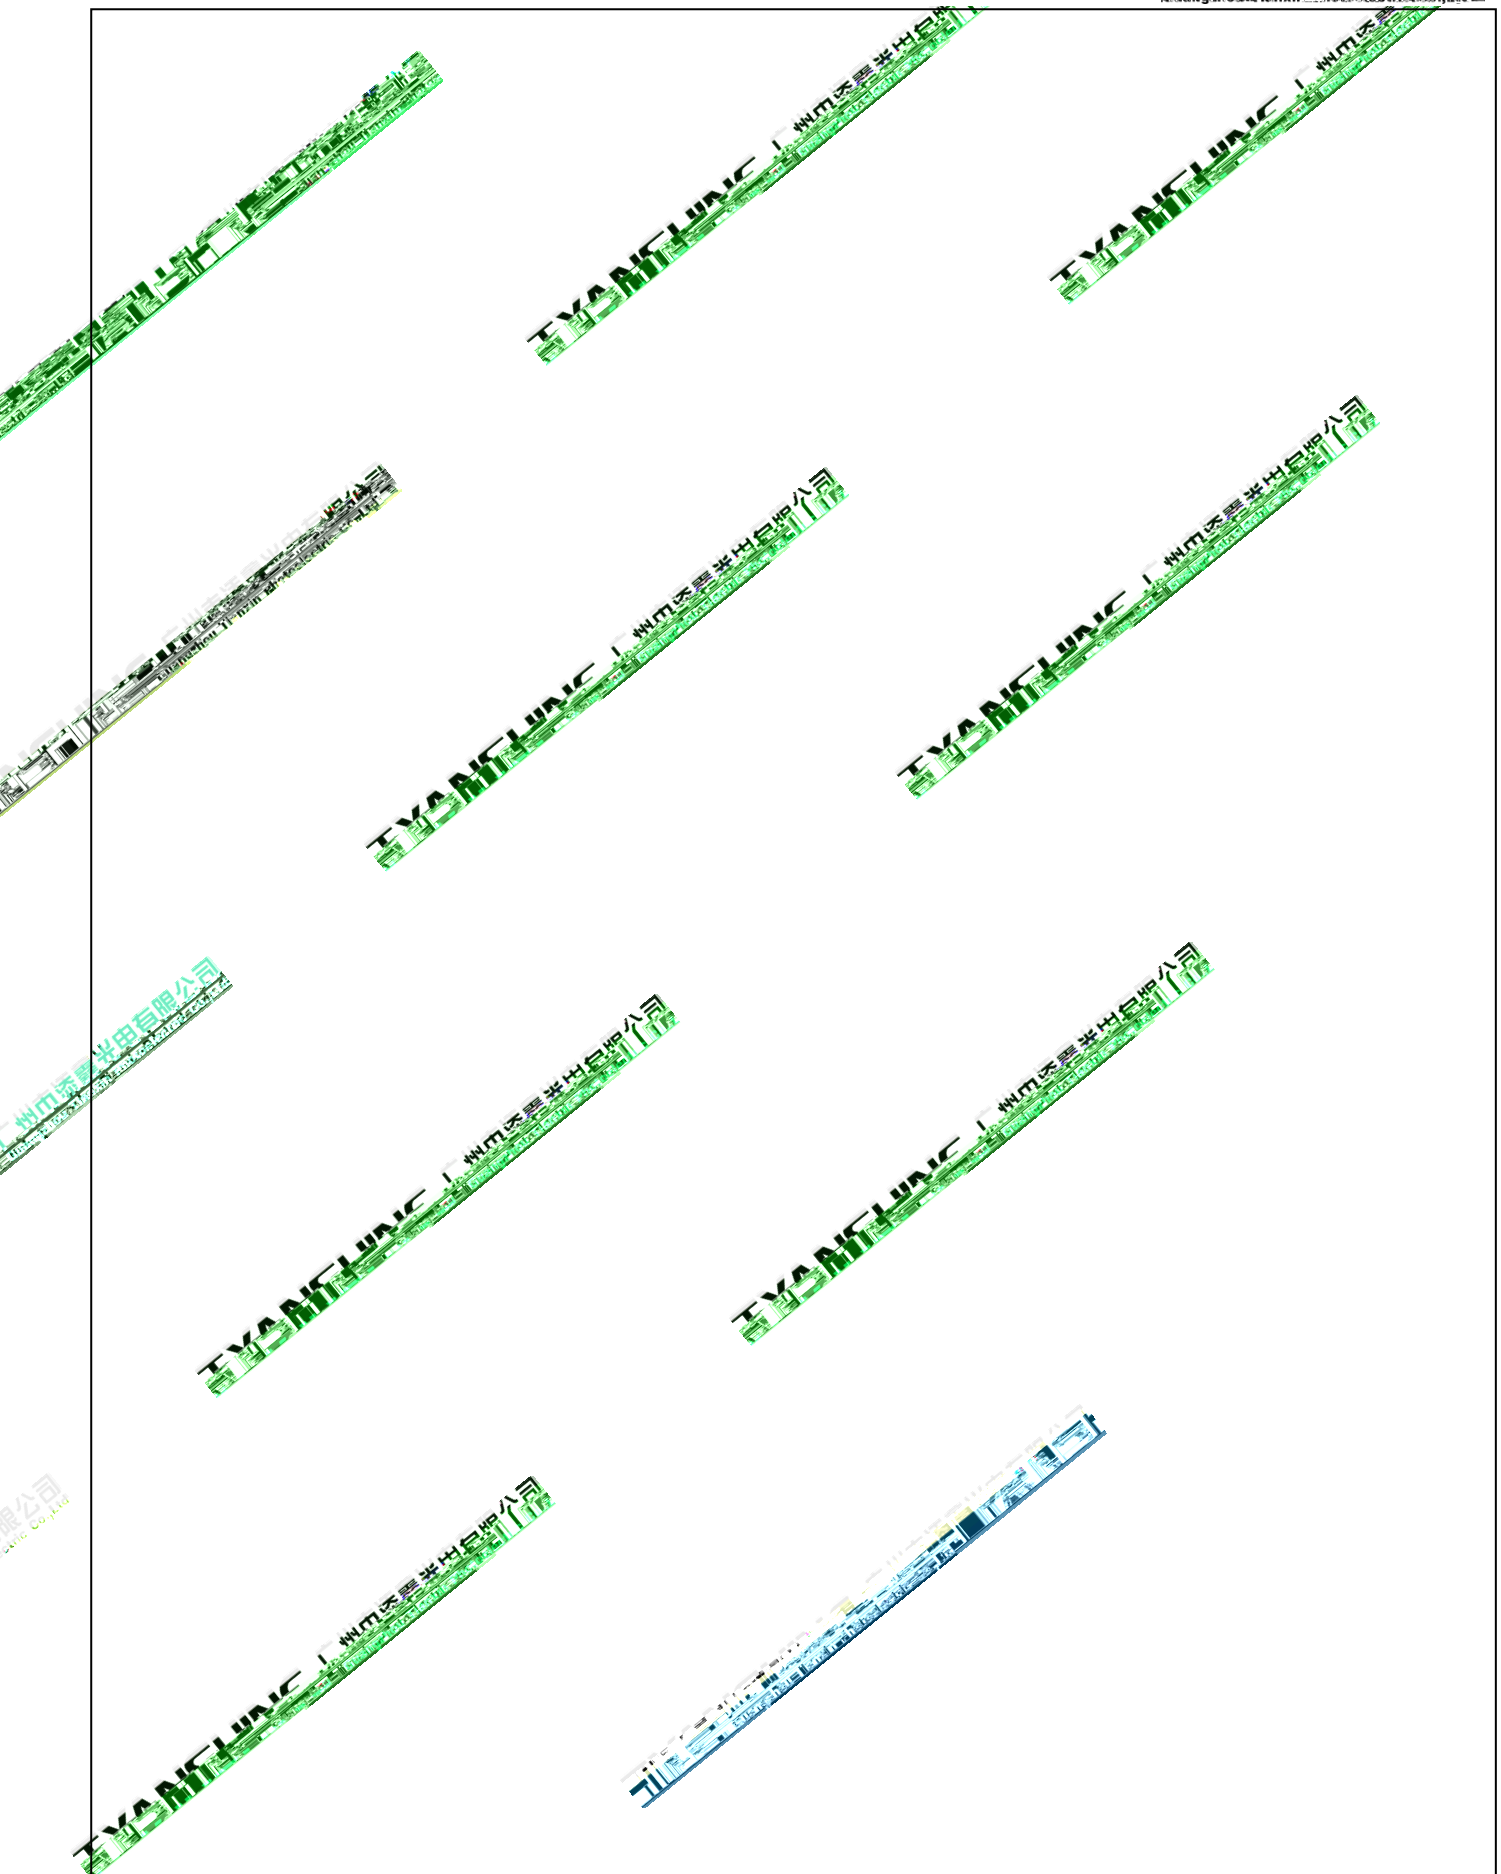

Part No.	TX-3535A3FCA1-0G4DB-01	Spec No.	WKF-ED0190	Page	8 of 9
----------	------------------------	----------	------------	------	--------





Part No.	TX-3535A3FCA1-0G4DB-01	Spec No.	WKF-ED0190	Page	9 of 9
----------	------------------------	----------	------------	------	--------